

Jevanord %
Etablert 1923

Traller

for rens og vaskerier

Trailer



Not perforated execution.



Perforated execution Ø 10.

BA 20

Smooth surfaces. Ribbed walls. Strong bottom frame and light alloy bumper.

858 CR



Watertight anodized light alloy truck. Drain tap. Perforated double bottom.



1695 CR

Anodized light alloy truck with a cut-out on a long side. Not perforated.

1380 CR



Not perforated execution, stiffening ribs on walls, anodized.

NOT PERFORATED TRUCKS

Art.	Code	Int. mm	Ext. mm	Ø mm	Weight kg	Lt.
BA 20	RABA200N002	1000 x 500 x 610 h	1030 x 530 x 770 h	100	16,7	305
BA 20	RABA200N004	1000 x 600 x 610 h	1030 x 630 x 770 h	100	17,8	366
BA 20	RABA200N010	920 x 680 x 685 h	950 x 710 x 875 h	125	20,4	428
BA 20	RABA200N006	1300 x 700 x 610 h	1330 x 730 x 805 h	125	25	555
BA 20	RABA200N008	1300 x 700 x 685 h	1330 x 730 x 880 h	125	27	623

Art.	Code	Int. mm	Ext. mm	Disp.	Weight kg	Lt.
1695 CR	RB1695ON001	1470 x 900 x 670 h	1500 x 930 x 865 h	1-2-1	37,8	886
858 CR	RG0858ON001	1000 x 600 x 450 h	1030 x 630 x 735 h	2+2	31,6	270
1380 CR	RC1380ON009	700 x 560 x 560 h	720 x 580 x 710 h	2+2	12,2	220
1380 CR	RC1380ON011	950 x 550 x 600 h	970 x 570 x 750 h	2+2	14,1	313

PERFORATED TRUCKS

Art.	Code	Int. mm	Ext. mm	Ø mm	Weight kg	Lt.
BA 20	RABA2002001	1000 x 500 x 610 h	1030 x 530 x 770 h	100	16	305
BA 20	RABA2002003	1000 x 600 x 610 h	1030 x 630 x 770 h	100	17	366
BA 20	RABA2002009	920 x 680 x 685 h	950 x 710 x 875 h	125	19,5	428
BA 20	RABA2002005	1300 x 700 x 610 h	1330 x 730 x 805 h	125	23,9	555
BA 20	RABA2002007	1300 x 700 x 685 h	1330 x 730 x 880 h	125	25,8	623

Trailer med hev senkebunn

680 CR



1-2-1


Spring loaded bottom trucks have been designed to keep users working plan at the maximum height.

Body in light alloy sheet, anodized. Reinforced and rounded upper edge. The self-levelling platform fixed on 2 carriages sliding in light alloy rails can work also with non uniform loads.


Bottom is tank shaped in order to prevent the material from getting stuck.

Strong non-twisting iron frame in epoxy finishing. Wheels in lozenge position or at the corners.

Springs are easily replaceable. On request springs with reduced capacity.



1-2-1



2+2



XPAS0680




XPA0680



680 CR *

Trucks with weight graduated scale.

Art.	Code	Int. mm	Ext. mm	Disp.	Weight kg	Lt.	📦
680 CR	RM06800N186	1000 x 420 x 530 h	1080 x 450 x 800 h	2 + 2	32	223	32
680 CR	RM06800N002	1000 x 600 x 560 h	1080 x 630 x 800 h	1-2-1	34,8	336	47
680 CR	RM06800N005	1390 x 700 x 560 h	1470 x 730 x 800 h	1-2-1	49	545	95
680 CR	RM06800N334	1470 x 900 x 585 h	1550 x 930 x 850 h	1-2-1	72,2	774	85
680 CR	RM06800N014	1000 x 600 x 560 h	1080 x 630 x 800 h	2 + 2	35,1	336	47
680 CR	RM06800N013	1390 x 700 x 560 h	1470 x 730 x 800 h	2 + 2	49,3	545	95
680 CR	RM06800N335	1470 x 900 x 585 h	1550 x 930 x 850 h	2 + 2	72,2	774	85
680 CR *	RM06800N026	1000 x 600 x 560 h	1080 x 630 x 800 h	1-2-1	34,8	336	47
680 CR *	RM06800N025	1000 x 600 x 560 h	1080 x 630 x 800 h	2 + 2	35,1	336	47

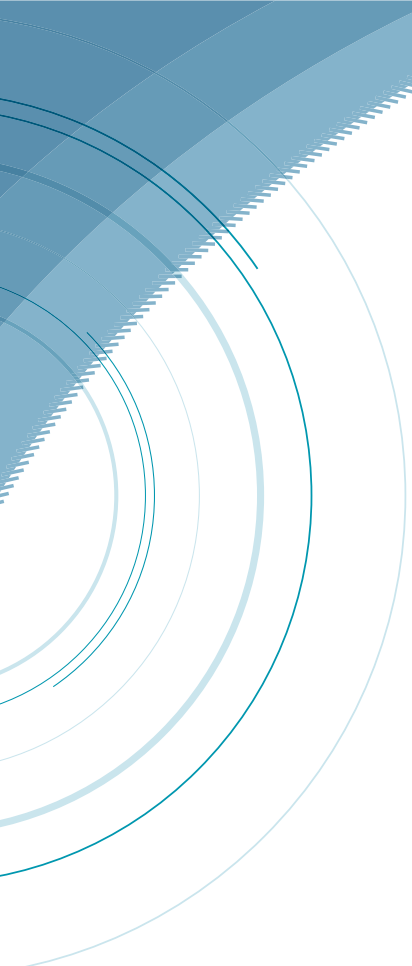

Jevanord %

Etablert 1923

Jevanord AS
Østensjøveien 15 B
0661 Oslo
Telefon: 22 57 85 00
E-post: jevanord@jevanord.no
www.jevanord.no