



Maximum Performance




DC 4

FEATURES AND BENEFITS

- Flexible construction allows hanging bars to slide easily forward for easy access to garments or down for more space
- Easy to install; the evacuating channel is connected to the ventilation system and the humid air is transported out of the room
- All electrical components are placed on the top which makes it easy to maintain
- Pull-out hanging system
- 3 temperatures: high, normal, low
- Energy efficient
- Overheat protection
- IP 24 classification
- CE-approved

DRYING CABINET

TYPE		DC 4
Loading capacity	kg/lb	4 / 8.8
Drying capacity	g/min*	17
Hanging length	m	16
Heating effect	kW	1.5
Total effect	kW	1.535
Energy consumption economy / kg	kWh	0.5
Energy consumption express / kg	kWh	0.6
ELECTRICAL CONNECTIONS		
Electrical connection (standard)		1x220-240V 50/60Hz
Total effect	kW	1.535
Heating elements	kW	1.5
AIR CONNECTIONS		
Outlet exhaust	ø mm	100
Outlet airflow	m ³ /h	45
Pressure drop	max Pa	60
Dewatering capacity	g/min	17*
SOUND LEVEL		
Airborne sound level	dB(A)	60
DIMENSIONS		
HxWxD	mm	1939x595x619
SHIPPING DATA		
Net	kg	61
Gross (crate)	kg	65
Shipping volume	m ³	0.2
* Valid for textile spun at high speed.		

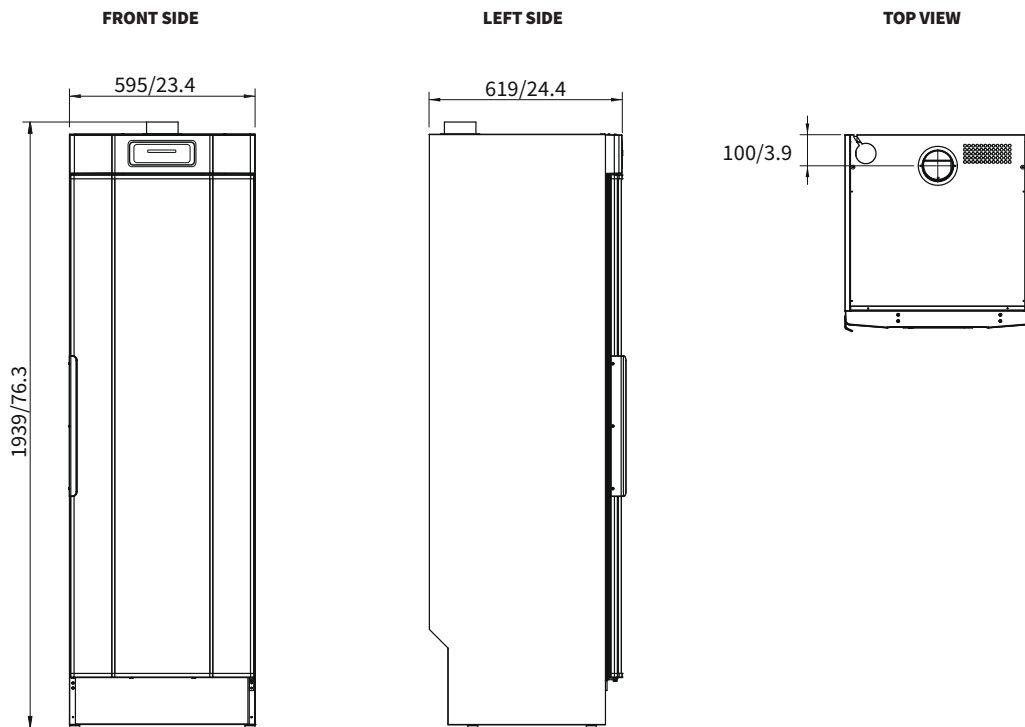

TO LEARN MORE, OR TO FIND A DISTRIBUTOR IN YOUR AREA, VISIT UNIMAC.COM
ALLIANCE LAUNDRY SYSTEMS - SHEPARD ST, RIPON WI 54971 - +1 800 587 5458

Consult your UniMac® distributor for details. For the most accurate information, the installation guide should be used for all design and construction purposes. Due to continuous product improvements, design and specifications subject to change without notice. The quality management systems at Alliance Laundry Systems® Ripon facility has been registered to ISO 9001:2008.

©2018 Alliance Laundry Systems LLC.

UniMac® by Alliance Laundry Systems